



Product Code

This is the first section of the description which outlines the product type, formulation, density, number of sides coated with adhesive and protective liner. See the following example.

V 15 1 0

Product or Formulation	Density	Adhesive	Protective Liner
E = Polyethylene	2 = 2 pcf	0 = None	0 = Cast on Paper
ESL = Eco Seal®	6 = 6 pcf	1 = 1 side	1 = None
V = Standard Vinyl Series	15 = 15 pcf	2 = 2 sides	2 = Cast on Aluminum
A = Special Automotive	Etc..		3 = Release Paper
C = Cling Foam®			4 = Laminated to Polyester Film with Adhesive & Release Paper
CP = Plastics Cling Foam®			5 = Cast on Polyester Film
F = Fire Retardant (UL94)			6 = Release Film
GHB = Gaska Hi Bond			7 = Release Board
L = Log Tite®			8 = Laminated to Polyester Film with Adhesive & Release Board
LC = Low Compression			9 = Other (Further information necessary)
MC = Improved Performance PVC			
MW = Weatherstrip Series			
SO = Semi Open Cell			
ULD = Ultra Low Density			
VK = High Compression Spacer			
PVN = Polyvinyl Nitrile			

Non-Standard Additions

This is the additional information which is included at the end of the code to specify other needs. Please note the proper order for consistency. Example as follows:

GY NF XR

Colors	Other and/or 2nd Protective Liners	Other Specific Needs
BE = Beige	ES = Polyester Film Laminated	XR = Extra Release
BK = Black	NF = 2 mil Natural Film	NR = No Release
BR = Brown	RP = 2nd Release Paper	SW = Stretch Wrap
BU = Blue		RW = Reverse Wrap
GN = Green		L = Lamination
GY = Gray		ER = Easy Release
NA = Natural		GS = Glove Skin
TN = Tan	NOTE: Custom jobs, materials die cuts, will have special designations as needed.	TS = Top Skin
RD = Red		CR = Completely Reversed

Dimensions

Following the product designation code in the part description are the dimensions of the product. The proper order is thickness, width and length. Note: Dimensions are sometimes not used - e.g. odd shaped die cut parts, some customer supplied materials, etc. The follow example illustrates dimensions:


.125 x 3.500 x 75

Thickness	Width	Length
In inches, up to 3 decimal places.	In inches, up to 3 decimal places.	In feet, up to two decimal places. If other, please specify.

Product Description

Adhesive Requirements

At the end of the part description is the adhesive type and amount. The following example illustrates the adhesive designation:

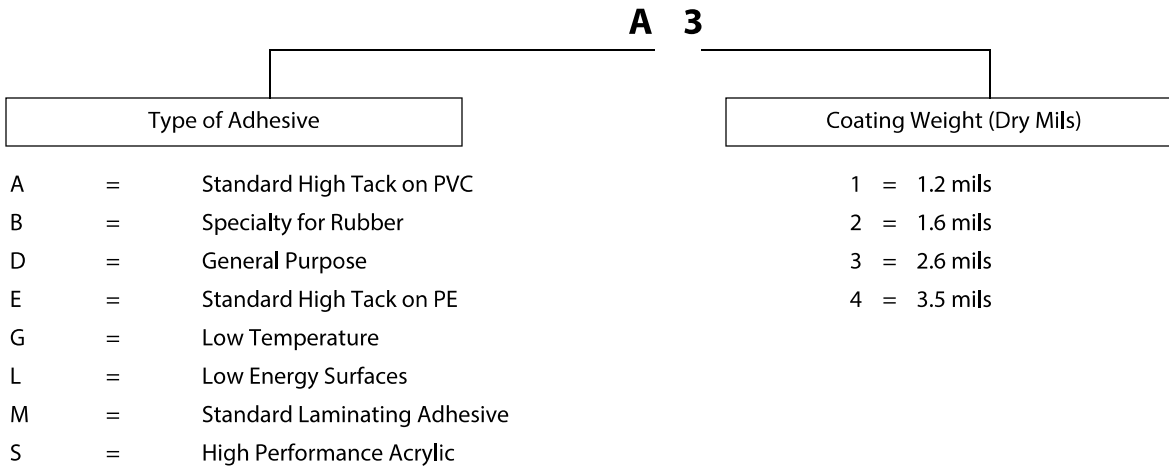

Warranty

Gaska Tape Inc. warrants its product to be free from defects in material and workmanship for a period of twelve (12) months beginning on the date of invoice, provided the purchaser installs and uses the products according to any instructions provided by Gaska Tape Inc. Any product which fails during the warranty period due to a defect will be replaced.

Upon request, Gaska Tape Inc. will be pleased to provide a copy of its written Limited Warranty with complete details of coverage, conditions and limitations.

Gaska Tape Inc. makes no other warranty, expressed or implied, and specifically disclaims and disavows any implied warranty of merchantability and of fitness for a particular use.

International Inquiries:
Phone: 00-574-294-5431

1810 W. Lusher
P.O. Box 1968
Elkhart, IN 46515-1968

 **Gaska Tape Inc.**
INNOVATORS IN FOAM AND TAPES
www.gaska.com

Phone: 574-294-5431
Fax: 574-293-4504
Toll free: 800-423-1571
email: sales@gaska.com

